

Rec'd PCT/PTO 15 OCT 2004

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 October 2003 (30.10.2003)

PCT

(10) International Publication Number
WO 03/089215 A1

(51) International Patent Classification⁷: B29C 33/40,
45/00

Drive, Eden Prairie, MN 55344-2020 (US). PRIEDE-
MAN, JR., William, R. [US/US]; c/o STRATASYS, INC.,
14950 Martin Drive, Eden Prairie, MN 55344-2020 (US).

(21) International Application Number: PCT/US03/10219 ✓

(74) Agents: CHAPMAN, Gena, M. et al.; KINNEY &
LANGE, PA, Kinney & Lange Building, 312 South Third
Street, Minneapolis, MN 55415-1002 (US).

(22) International Filing Date: 4 April 2003 (04.04.2003) ✓

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/373,236 17 April 2002 (17.04.2002) US ✓

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW. ✓

(71) Applicant: STRATASYS, INC. [US/US]; 14950 Martin ✓
Drive, Eden Prairie, MN 55344-2020 (US).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), ✓
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): CRUMP, Steven,
Scott [US/US]; c/o STRATASYS, INC., 14950 Martin

[Continued on next page]

(54) Title: LAYERED DEPOSITION BRIDGE TOOLING ✓

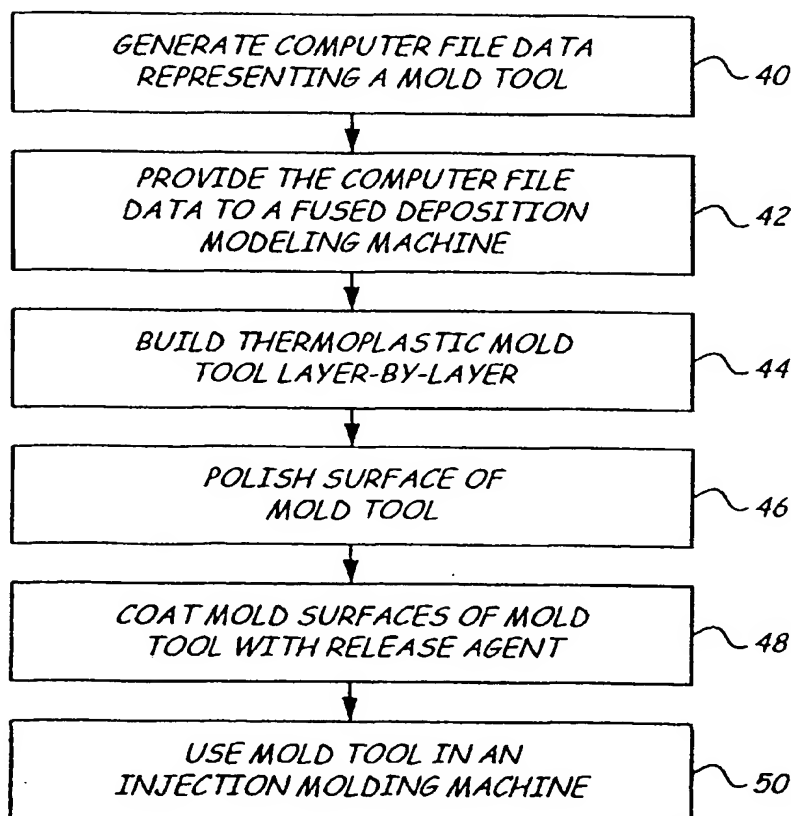

(57) Abstract: Disclosed is a method for making a prototype plastic injection molded part from a mold tool (10) built by fused deposition modeling. The mold tool (10) is built by depositing roads of a molten thermoplastic resin in layers in a predetermined pattern defined by computer file data representing the inverse of the desired prototype molded part, and is used in an injection molding machine without the addition of any reinforcement fill material or layers to create the prototype part. The disclosed method provides prototype plastic injection molded parts within a twenty-four hour time period.



WO 03/089215 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

LAYERED DEPOSITION BRIDGE TOOLING**CROSS-REFERENCE TO RELATED APPLICATION(S)****BACKGROUND OF THE INVENTION**

5 The present invention relates to prototyping of injection molded objects, and more particularly to methods for rapidly making mold tools for use in plastic injection molding prototyping processes.

In a typical injection molding process, plastic is injected at high pressures, extremely quickly, into a thermally conductive metal mold. The molded part is quickly cooled to a temperature at which it can be removed
10 from the mold. The part is then quickly ejected from the mold so that another part can be made, and so that the part does not become stuck on the mold (due to shrink differential). Cooling of large parts continues on a fixture. The goals of production injection modeling are to produce a high quantity of high-quality parts in a short turn-around time. A thirty second cycle time or
15 less for the making of each molded part is typical.

In order to produce a three-dimensional object in a typical injection molding process, it is necessary to prepare a mold tool that has a cavity which is complementary to the desired shape of the three-dimensional object. The mold tool generally consists of two opposing halves, which mate
20 together to define the mold cavity. The mold tool is normally machined out of steel or other metal which is capable of withstanding high temperature and pressure when hot liquid is injected into the mold. In use, the mold tool is inserted into a frame of an injection molding machine, and held in place with high clamping forces to oppose pressure generated inside the mold.
25 The time and skill required to prepare the mold tool are both significant. The machining must be done by skilled craftsmen, and includes the incorporation of a sprue through which the molding material is injected, a vent, cooling lines and ejector pins. Typically, this process involves placing an order with an outside vendor and waiting several weeks or months for delivery, at high
30 cost.

Before undergoing the expense and long lead time associated with conventional metal mold manufacturing, it is desirable to produce a

prototype of the part that will have similar characteristics to the production part. The goal is produce a prototype having characteristics sufficiently close to that of the desired final manufactured part so as to permit a close prediction of part performance. Various additive process rapid prototyping (RP) technologies are commonly used to make prototype parts in the design stages of a part. These rapid prototyping technologies include fused deposition modeling (FDM), stereolithography (SLA), selective laser sintering (SLS), laminated object manufacturing (LOM) and jet technology. These additive process techniques produce prototypes useful for evaluating the fit, form and function of a part design, to gain preliminary part approval and to accelerate product development. The strength of a final production part is not, however, replicated in prototypes created by these rapid prototyping techniques. The additive processes create layers, layered stress points and voids in the part resulting in a different internal stress structure than that of the homogeneous injection-molded part. Additionally, many materials used in these processes are weak.

Various methods have been developed for creating mold tools used to make prototype injection molded parts, which may be referred to as "bridge tooling" or "temporary tooling." A number of these methods utilize rapid prototyping techniques, particularly, stereolithography. For example, U.S. Patent No. 5,439,622 describes the use of stereolithography to form a mold shell, which is then reinforced with an incompressible material and coated with a thermally conductive material. U.S. Patent No. 5,989,679 describes a mold tool formed by injecting a strengthening material into cavities within an object formed by stereolithography. U.S. Patent No. 5,952,018 describes a mold tool, including an ejection valve within the mold tool, formed by stereolithography. U.S. Patent No. 5,641,448 describes the making of a mold tool by depositing a metal coating onto a plastic mold shell produced by stereolithography.

The use of rapid prototyping to create molds for use in processes other than injection molding are also known. For example, U.S. Patent No. 6,073,056 describes a mold built by stereolithography or fused deposition

modeling used to form a vacuum cast part. U.S. Patent No. 6,103,156 describes the making of a prototype part by pouring a thermoset into a mold formed by a rapid prototyping technique.

Techniques are also known which use a part formed a rapid
5 prototyping process as a master mold pattern to create a prototype mold tool. For example, U.S. Patent No. 5,189,781 describes the use of a prototype part as the pattern for making a sprayed metal mold. U.S. Patent No. 5,707,578 uses a prototype created by stereolithography as a master mold.

10 A commercial process known as the Swiftool™ process uses a prototype part, which may be made by a rapid prototyping technique, as a pattern for creating bridge tooling. The process takes several days. Another commercial process known as 3D Keltool® makes bridge tooling in a period of several days in a metal-powder sintering process, starting from a master
15 pattern made by stereolithography. Yet another commercial system called AIM™ builds mold tools by stereolithography using UV-sensitive materials.

While the above-described methods do reduce the time and expense of making mold tools, such methods nonetheless require finishing steps which can be tedious and which require additional time and skill to complete.
20 There is a need for a more rapid and low cost method of making a mold tool which can be used to create a small number of prototype injection molded parts.

BRIEF SUMMARY OF THE INVENTION

The present invention is a method for making a prototype plastic
25 injection molded part using a mold tool made by a fused deposition modeling technique. In one embodiment, the mold tool is built in two or more portions, wherein layers of thermally solidifiable material are deposited in a predetermined pattern according to computer file data representing the mold shape. Each mold portion includes a mold surface, a mating surface, and
30 a base which supports the mold and mating surfaces. Together the mold portions define a mold cavity. A sprue channel and alignment holes are either formed into the mold tool as it is built, or machined into the mold tool

after it is built. A vent channel may likewise be built or machined into the mold tool, or, the build process itself may be designed to result in the mold tool itself having a porosity sufficient to vent the tool. Optionally, the mold surfaces and mating surfaces may be smoothed by a vapor smoothing process to remove unintentional ridges in the surfaces. The mold tool is used in an injection molding machine, without the addition of any reinforcement fill material or layers, to create the prototype part.

In an alternate embodiment, the mold tool is made from a soluble modeling material and has a single-piece construction.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a top plan view of two mold portions of an exemplary mold tool produced by fused deposition modeling in accordance with the present invention.

Figure 2 is a sectional view of the mold portions of FIG. 1, taken along a line 2-2 of FIG. 1 and mated together to define a mold cavity.

Figure 3 is a flow diagram of the process of making a prototype injection molded part using a mold tool built in accordance with the present invention.

DETAILED DESCRIPTION

Figure 1 shows two halves of an exemplary mold tool 10 built in accordance with the present invention. A first portion 12 of mold tool 10 includes a recessed mold surface 14 corresponding to the shape of a first half of a desired prototype molded part. A second portion 16 of mold tool 10 includes a recessed mold surface 18 corresponding to the shape of a second half of the desired prototype molded part. The mold portions 12 and 16 each have a mating surface 17 and a base 20 shown in FIG. 2, which supports the mold surfaces 14 and 18 and the mating surfaces 17. When the mating surfaces 17 of the mold portions 12 and 16 are mated together as shown in FIG. 2, the mold surfaces 14 and 18 define a mold cavity 19, which has the shape of the desired prototype part. For prototype molded parts that have interior cavities, the mold tool 10 further comprises a mold core.

The mold portions 12 and 16 each also include a sprue channel 22, a vent channel 24, and four alignment holes 26. The sprue channels 22 allow for the placement of a sprue which will be inserted in a final assembly of the mold tool 10, providing a path for the injection of molten plastic into the mold cavity 19. The vent channels 24 together form a passage for the venting of gas from the mold cavity 19 when the mold tool 10 is assembled.

The alignment holes 26 receive screws or pins, which align and hold together the mold tool portions 12 and 16 in assembly of the mold tool 10. The mold tool 10 may also optionally include cooling lines for introducing a flow of coolant during an injection process.

In an alternate embodiment, a mold tool is made from a soluble modeling material and has a single-piece construction. The soluble material permits a single-piece construction, as the mold tool may be dissolved from a prototype part after the part is formed. In contrast, a mold tool made from an insoluble material is removed from a prototype part by mechanically disengaging the mold portions. A suitable soluble modeling material is an alkali-soluble material comprising a base polymer containing a carboxylic acid, and a plasticizer. The base polymer comprises a first comonomer (which contains carboxylic acid) and a second comonomer that is polymerized with the first comonomer to provide thermal and toughness properties suitable for fused deposition modeling. A preferred base polymer is comprised of methacrylic acid as the first comonomer and an alkyl methacrylate (e.g., methyl, ethyl, propyl or butyl methacrylate, and combinations thereof), preferably methyl methacrylate, as the second comonomer. A desirable amount of the acid-containing first comonomer is 15-60 weight percent of the base polymer. The base polymer is plasticized to attain rheological properties desired for the modeling process. Most preferably, the alkali-soluble thermoplastic material contains between about 84 weight percent and 74 weight percent of the base polymer and contains between about 16 weight percent and 26 weight percent of the plasticizer, and has a melt flow index of between about 5 g/10 minutes and 10 g/10 minutes under a load of 1.2 kg at 230 °C. A mold tool made from the alkali-

soluble material is removed from the prototype part by placing the mold tool containing the part in an alkaline bath. The alkali-soluble modeling material is the subject of co-pending U.S. Patent application serial no.10/019,160, International Application No. PCT/US00/10592 (published as WO
5 00/62994), assigned to the same assignee as the present application, and which is hereby incorporated by reference as if set forth fully herein.

The mold tool of the present invention is built by a fused deposition modeling process. Fused deposition modeling is a rapid prototyping technique that builds up three-dimensional objects in layers by extruding
10 molten modeling material in a predetermined pattern according to computer file data representing the mold tool. The computer file data is derived from information available on the desired prototype molded part. For example, typically, the part is designed using a computer-aided design (CAD) system, and corresponding information relating to the outline of the part is derivable
15 from a CAD file defining the desired part. A computer program designs the mold portions in accordance with the outline of the desired part, as the inverse of the desired part shape. A software program available from Moldflow Corporation will design the mold portions in this manner. A further software program "slices" the computer representation of the mold portions
20 into horizontal layers. The modeling machine extrudes the roads of modeling material layer-by-layer, with each extruded road having a thickness equal to the height of a slice. The extruded material fuses to previously deposited material and solidifies upon a drop in temperature to form the mold portions. The mold portions may be built simultaneously in the
25 modeling machine, or one at a time. In a preferred embodiment, the mold portions 12 and 16 are built from a polyphenylsulfone resin on a Stratasys® Titan™ FDM® fused deposition modeling machine.

The sprue channels 22, the vent channels 24, the alignment holes 26, and any cooling lines are preferably formed into the mold portions 12 and 16
30 as they are built. This can be done by including such features in the computer file data representing the mold tool 10. Alternatively, a sprue channel, vent channel, cooling lines and/or alignment holes may be

machined into the mold portions 12 and 16 after they are built. The channels 22 and 24 and the alignment holes 26 shown in the exemplary mold tool 10 are merely one example of the placement and design of such features. Alternative designs include vertical orientation of the channels 22 and 24, and forming a single sprue channel or vent channel within one or the other of mold portions 12 and 16.

The need for a vent channel in the mold tool 10 may be avoided by controlling the extrusion pattern of the roads so that the mold tool 10 has an inherent porosity providing an open-cell matrix sufficient to vent gas from the mold cavity 19. Controlled porosity fused deposition modeling is taught in U.S. Patent No. 5,653,925.

The mold tool 10 is formed from a thermoplastic resin that is compatible with the fused deposition modeling process and that will sustain the temperature and pressure of the injection molding process, so as to produce at least one prototype plastic injection molded part. An exemplary thermoplastic resin comprises at least 50 weight percent of a thermoplastic selected from the group consisting of polyphenylsulfone, polysulfone, polystyrene, polyphenylene ether, amorphous polyamides, polycarbonate, polyaryletherketone, acrylics (e.g., methyl methacrylate), nylon, poly(2-ethyl-2-oxazoline), and blends thereof. The thermoplastic resin may contain various fillers, additives and the like, as will be understood by those skilled in the art. A particularly preferred thermoplastic for use in creating a mold tool in accordance with the present invention is a polyphenylsulfone-based resin. One such thermoplastic comprises polyphenylsulfone blended with between about 2-20 weight percent polycarbonate (preferably near 10 percent).

FIG. 3 shows a flow diagram which summarizes the method of producing a prototype injection molded part in accordance with the present invention. A CAD tool is used to generate computer file data representing a mold tool, in step 40. The data is provided to a fused deposition modeling machine, in step 42. The mold tool is built in the fused deposition modeling machine, in layers defined by the computer file data, in step 44. In an

optional step 46, the mold surfaces and/or mating surfaces of the mold tool are smoothed to remove ridges unintentionally created in the formation of the mold tool. In a preferred embodiment, the smoothing is done by a vapor smoothing process, which is the subject of International Application No. 5 PCT/US03/_____ entitled "Smoothing Method For Layered Deposition Modeling", W. Priedeman and D. Smith, filed on even date herewith, assigned to the same assignee as the present application, and incorporated by reference as if set forth fully herein. As is taught in said co-pending application, certain mold features may be identified for solvent masking or 10 for pre-distortion prior to the vapor smoothing step, and the computer file data representing the mold tool may include data identifying said features. Alternative smoothing techniques include sanding, grinding, and thermal ironing.

The mold surfaces of the mold tool are then coated with a release 15 agent, in a step 48. Suitable release agents include dry film lubricants, and others that will be recognized by those skilled in the art. If needed, sprue and vent channels and alignment holes are machined into the mold tool prior to step 48. A final step 50 is to perform injection molding using the mold tool. The mold tool is assembled in an injection molding machine, without 20 the addition of any reinforcement fill material or layers.

Using the method of the present invention, a prototype plastic injection molded part can be produced within a 24-hour time period.

Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes 25 may be made in form and detail without departing from the spirit and scope of the invention.

CLAIMS:

1. A method for making a prototype plastic injection molded part, comprising the steps of:
 - 10 providing computer file data representing a mold tool;
building the mold tool by depositing roads of a molten thermoplastic resin in layers in a predetermined pattern defined by the computer file data, the mold tool defining a mold cavity; and
using the mold tool in an injection molding machine, without the
15 additional of any reinforcement fill material or layers, to create the prototype part by injection molding of plastic.
2. The method of claim 1, wherein the thermoplastic resin comprises at least about 50 weight percent of a thermoplastic selected from the group consisting of polyphenylsulfone, polysulfone, polystyrene, polyphenylene
20 ether, amorphous polyamides, polycarbonate, acrylics, nylon, poly(2-ethyl-2-oxazoline), and blends thereof.
3. The method of claim 1, wherein the thermoplastic resin is a polyphenylsulfone-based resin.
4. The method of claim 1, wherein a sprue channel and alignment holes
25 are formed into the mold tool as it is built.
5. The method of claim 1, and further comprising the step of:
machining a sprue channel into the mold tool, prior to the step of
using the mold tool in an injection molding machine.
6. The method of claim 1, and further comprising the step of:
30 machining a plurality of alignment holes into the mold tool, prior to the step of using the mold tool in an injection molding machine.
7. The method of claim 1, wherein the predetermined pattern results in the mold tool having a porosity sufficient to vent gas in the
35 mold cavity generated by injection of the plastic.
8. The method of claim 1, wherein a vent channel is formed into the mold tool as it is built.
9. The method of claim 1, and further comprising the step of:

machining a vent channel into the mold tool, prior to the step of using the mold tool in an injection molding machine.

10. The method of claim 1, and further comprising the step of:
coating surfaces of the mold cavity with a release agent prior to the
5 step of using the mold tool in an injection molding machine.
11. The method of claim 1, wherein the step of building the mold tool comprises building two or more mating mold portions, each mold portion having a mold surface, a mating surface, and a base which supports the mold and mating surfaces, the mold surfaces together defining the mold
10 cavity.
12. The method of claim 11, and further comprising the step of:
smoothing surfaces of the mold tool prior to the step of using the
mold tool in an injection molding machine.
13. The method of claim 11, wherein the step of building the mold tool
15 further comprises building a mold core.
14. The method of claim 13, and further comprising the step of:
assembling the mold core in the mating portions of the mold tool prior
to the step of using the mold tool in an injection molding
machine.
- 20 15. The method of claim 14, wherein the thermoplastic resin forming the mold core is an alkali-soluble thermoplastic, comprising a base polymer containing between about 15 weight percent and 60 weight percent of a carboxylic acid, and a plasticizer, and further comprising the step of:
dissolving the mold core from the prototype part.
- 25 16. A method for making a prototype plastic injection molded part, comprising the steps of:
providing computer file data representing a mold tool;
building the mold tool by depositing roads of a molten soluble
thermoplastic resin in layers in a predetermined pattern
30 defined by the computer file data;

using the mold tool in an injection molding machine, without the additional of any reinforcement fill material or layers, to create the prototype part by injection molding of plastic; and dissolving the mold tool to release the prototype part.

- 5 17. The method of claim 16, wherein the soluble thermoplastic resin is an alkali-soluble thermoplastic comprising:

 a base polymer containing between about 15 weight percent and 60 weight percent of a carboxylic acid, and a plasticizer.

- 10 18. The method of claim 17, wherein the carboxylic acid is methacrylic acid and wherein the base polymer further contains an alkyl methacrylate.

19. The method of claim 18, wherein the alkyl methacrylate is methyl methacrylate and wherein the base polymer contains between about a 1:1 to a 1:2 weight percent ratio of methacrylic acid to methyl methacrylate.

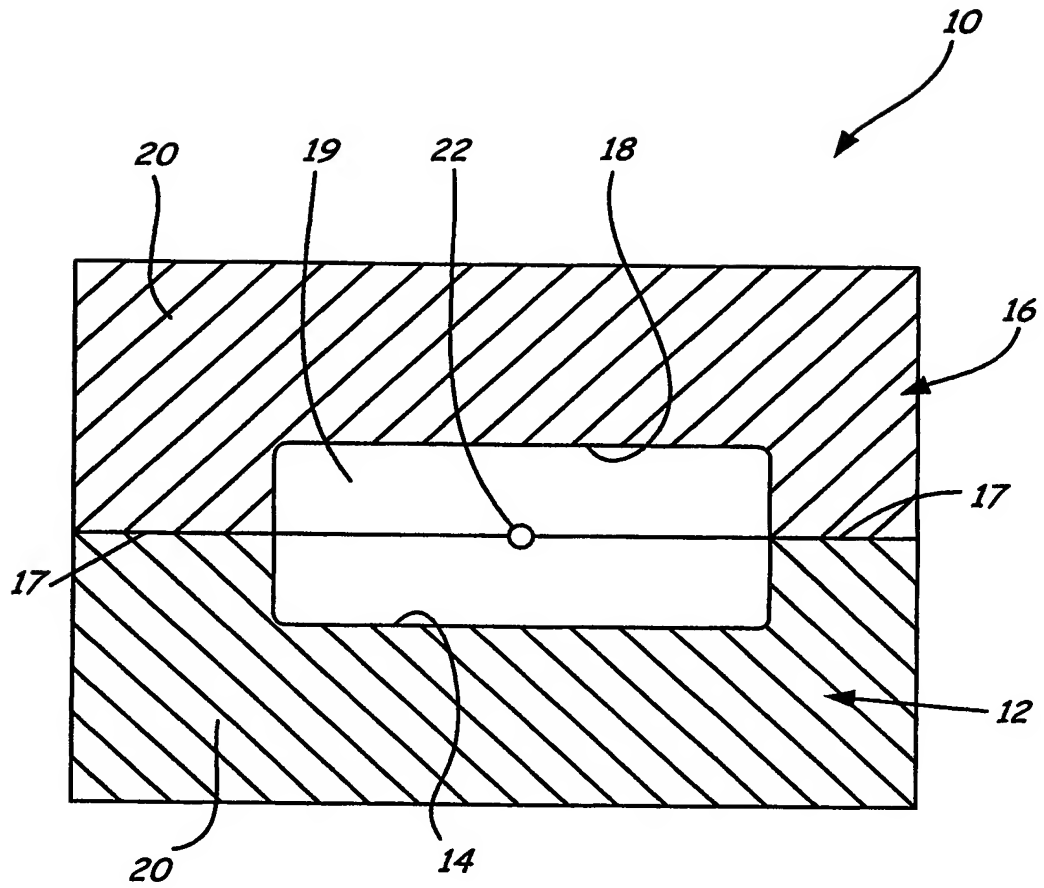


FIG. 2

3/3

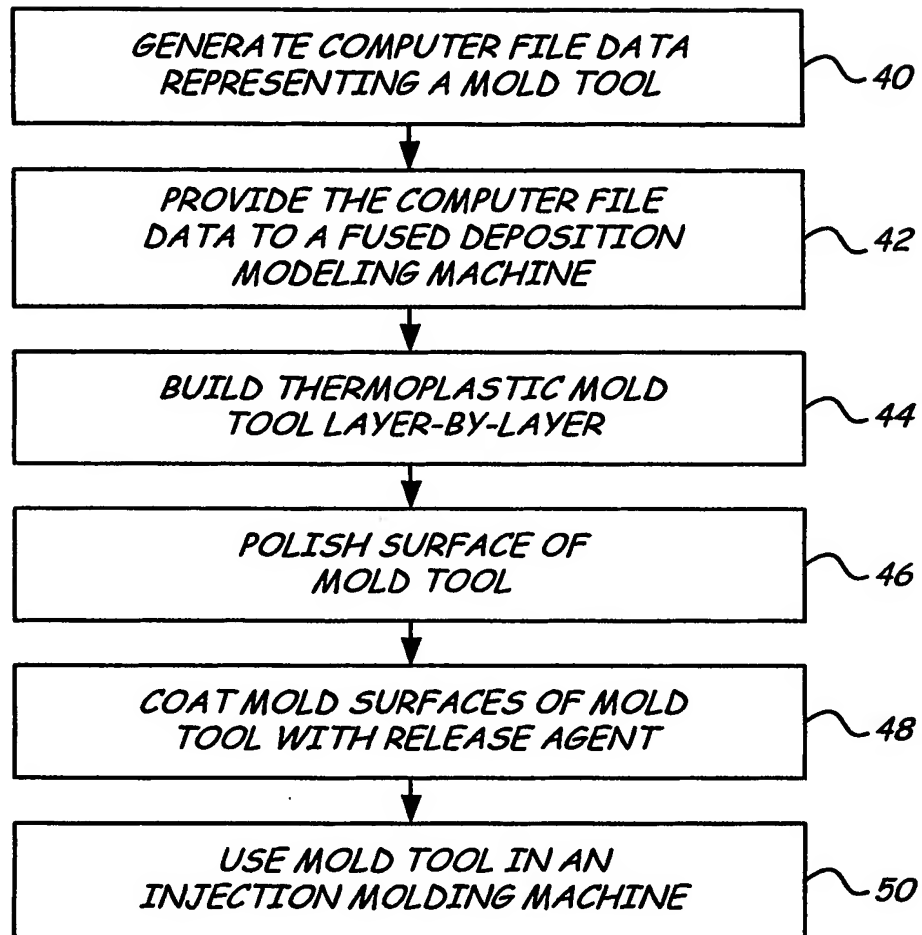


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/10219

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : B29C 33/40, 45/00

US CL : 264/219, 317, 401

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 264/154, 162, 219, 317, 338, 401

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| A | US 5,189,781 A (WEISS ET AL.) 02 MARCH 1993 | |
| Y | US 5,591,563 A (SUZUKI ET AL.) 07 JANUARY 1997, col. 13, lines 11-22 | 17-19 |
| Y | US 5,952,018 A (BELDUE ET AL.) 14 SEPTEMBER 1999, the entire document | 1-19 |
| A | US 6,001,298 A (McAloon) 14 DECEMBER 1999 | |

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

| | |
|---|--|
| * Special categories of cited documents: | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention |
| "A" document defining the general state of the art which is not considered to be of particular relevance | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone |
| "E" earlier application or patent published on or after the international filing date | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "&" document member of the same patent family |
| "O" document referring to an oral disclosure, use, exhibition or other means | |
| "P" document published prior to the international filing date but later than the priority date claimed | |

Date of the actual completion of the international search

26 June 2003 (26.06.2003)

Date of mailing of the international search report

19 AUG 2003

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Facsimile No. (703)305-3230

Authorized officer

ALLAN KUHN *Allen Kuhns*
Telephone No. (703) 308-3462